
**MODEL** : \$560

FORD RANGER T6 D/CAB

INSTALLATION S-560N

1/2

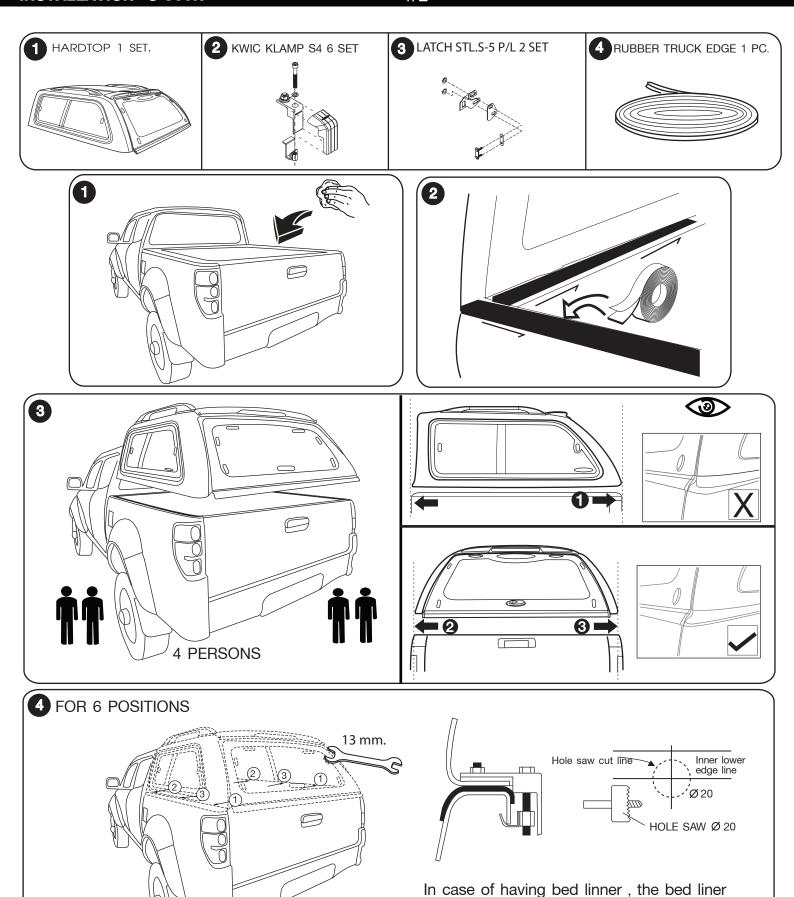

must be drilled with a hole saw 20 mm. at the

same level of truck's inner low edge



FORD RANGER T6 D/CAB




The Name of Quality and Design


....

**MODEL: S560** 

**INSTALLATION S-560N** 

2/2

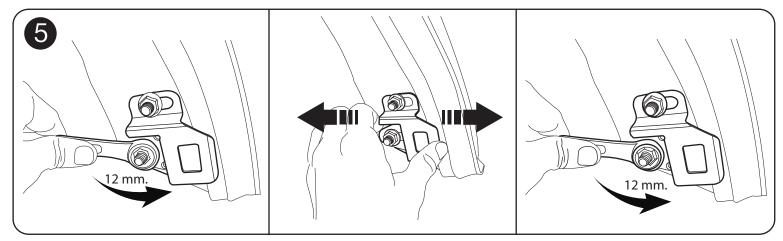

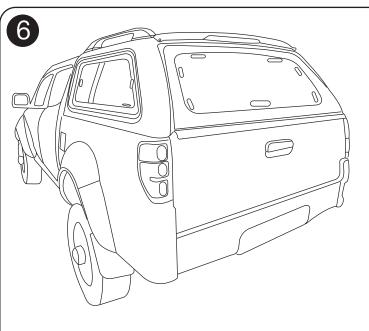

## Installation manual for hardtop

- 1. Clean all around truck edge.
- 2. Place the rubber truck edge on the truck all around.
- 3. Place the hardtop on the edge of truck bed box and arrange left and right.
- 4. Klamp 6 position of Kwick Klamp
- 5. Adjust latch R/L for matching with the rotary
- 6. Check all around hardtop

